
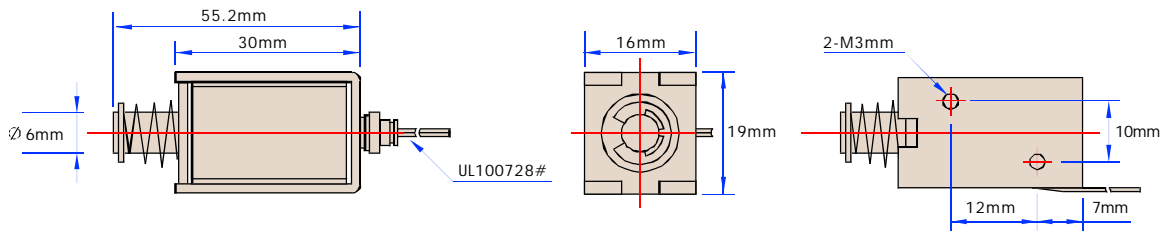



SDO-0630S OPEN FRAME SOLENOID

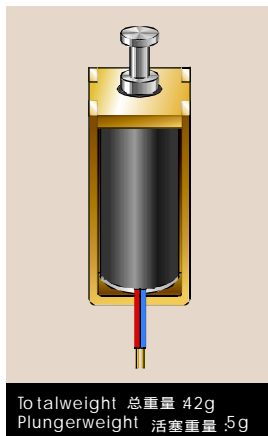

ORDERING INFORMATION

代号编排

SD ZANTY 宗泰
O-06 Open Frame Solenoid 开置式螺线管
30 Plunger dia(mm) 滑杆直径(mm)
S- Frame length(mm) 框架长度(mm)
***** Coil Resistance 线圈电阻 : * Ω
***** Serial Number 序号
***** Voltage 电压 :06:DC6V 12:DC12V 24:DC24V 48:DC48V
L: Pull Type 吸入式 **S:** Push Type 推出式

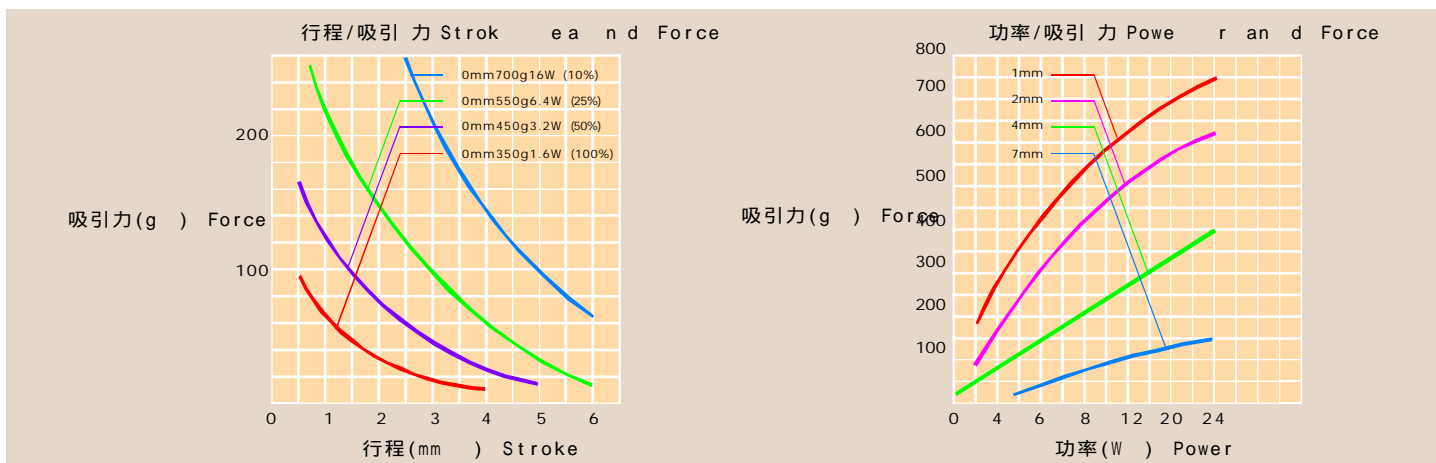

动作周期 (100%) ON时间/ON时间+OFF时间 Duty cycle(100%) "ON" time/"ON" time+"OFF" time	100%	50%	25%	10%	
	连通 continuous	间断 intermittent			
最大ON时间 (秒) MAX "ON" Time in second	-	55	19	3	
20°C 时的功率 watt at 20°C	2.4	4.8	9.6	24	
型号 TYPE Number	电阻 resistance Ω	电压 volts DC			
SDO-0630S-06A	15	6	8.5	12	19
SDO-0630S-12A	60	12	17	24	38
SDO-0630S-24A	240	24	34	48	76
SDO-0630S-48A	960	48	68	96	152



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building C1,C2,B2, Jihua Industry District, Shenzhen, China P.C.:518112
 Tel.:(+86 755) 2854 3752 Fax:(+86 755) 2854-3458
 E-mail: Sales@Zanty.com Website: www.zanty.com