



SDT-1313S TUBULAR SOLENOID

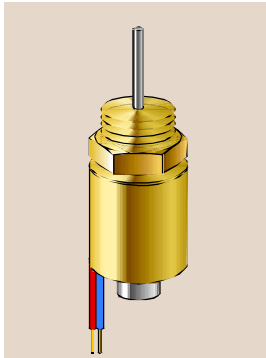

Totalweight 总重量 :14.5g
Plungerweight 活塞重量 :3g

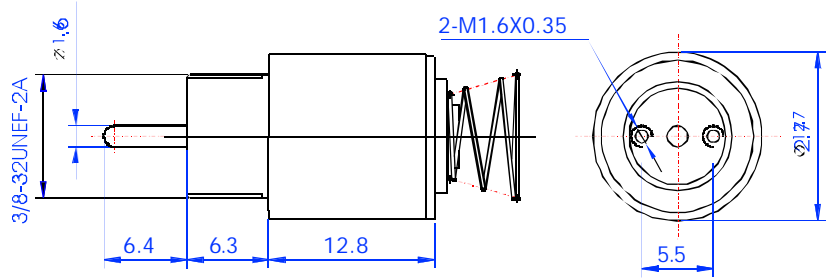


ORDERING INFORMATION 代号编排

SD T - 13 13 S - * * *


ZANTY 宗泰
Tubular Solenoid 筒状电磁铁
Tubedia(mm) 圆筒直径(mm)
Tubelength(mm) 圆筒长度(mm)

Coil Resistance 线圈电阻 : * Ω
Serialnumber 序号
Voltage 电压 :06:DC6V 12:DC12V 24:DC24V 48:DC48V
L: PullType 吸入式 S: Push Type 推出式

行程/吸引力 Stroke and Force

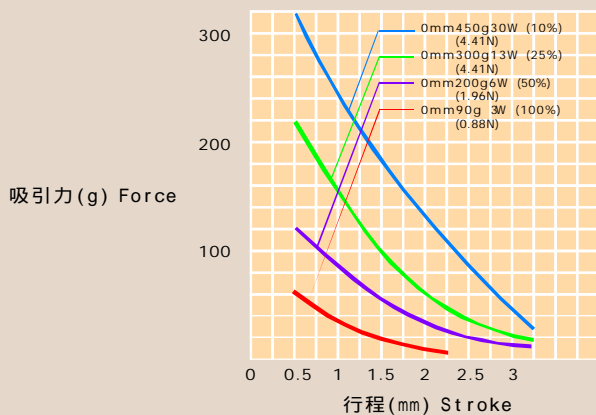

行程/响应时间 Stroke and Time

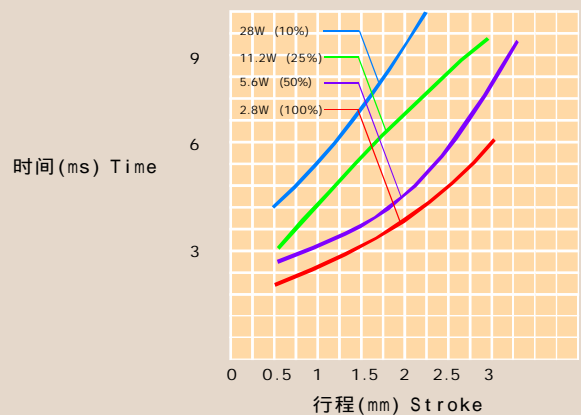

| 动作周期 (100%) ON时间/ON时间+OFF时间 Dutycycle(100%) "ON"time/"ON"time+"OFF"time | | 100% | 50% | 25% | 10% |
|--|----------------|---------------|-----------------|-----|-----|
| | | 连通 continuous | 间断 intermittent | | |
| 最大ON时间 (秒) MAX "ON"Time insecond | | - | 50 | 5 | 2 |
| 20°C 时的功率 wattat20°C | | 4 | 6 | 12 | 30 |
| 型号 TYPE Number | 电阻 resistanceΩ | 电压 voltsDC | | | |
| SDT-1313S-3.4A | 3.9 | 3.4 | 4.8 | 7 | 11 |
| SDT-1313S-5.4A | 9.5 | 5.4 | 7.7 | 11 | 17 |
| SDT-1313S-8.5A | 23.0 | 8.5 | 12 | 37 | 27 |
| SDT-1313SL-17A | 86.5 | 17 | 24 | 34 | 54 |



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building C1,C2,B2, Jihua Industry District, Shenzhen, China
Tel.: (+86 755) 2854-3752
Fax: (+86 755) 2854-3458

P.C.: 518112

E-mail: Sales@Zanty.com
Website: www.zanty.com