



# SDO-0837S OPEN FRAME SOLENOID

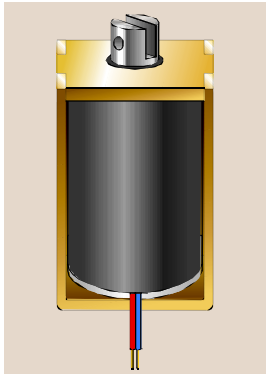

Totalweight 总重量 96g  
Plungerweight 活塞重量 :12g

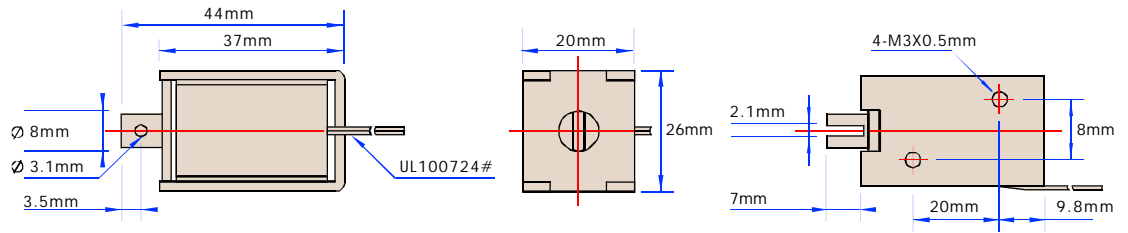


## ORDERING INFORMATION

代号编排

SD O-08 37 S- \* \* \*

ZANTY 宗泰  
Open Frame Solenoid 开置式螺线管  
Plunger dia(mm) 滑杆直径(mm)  
Frame length(mm) 框架长度(mm)  
Coil Resistance 线圈电阻 : \* Ω  
SerialNumber 序号  
Voltage 电压 :06:DC6V 12:DC12V 24:DC24V 48:DC48V  
L: PullType 吸入式 S: Push Type 推出式

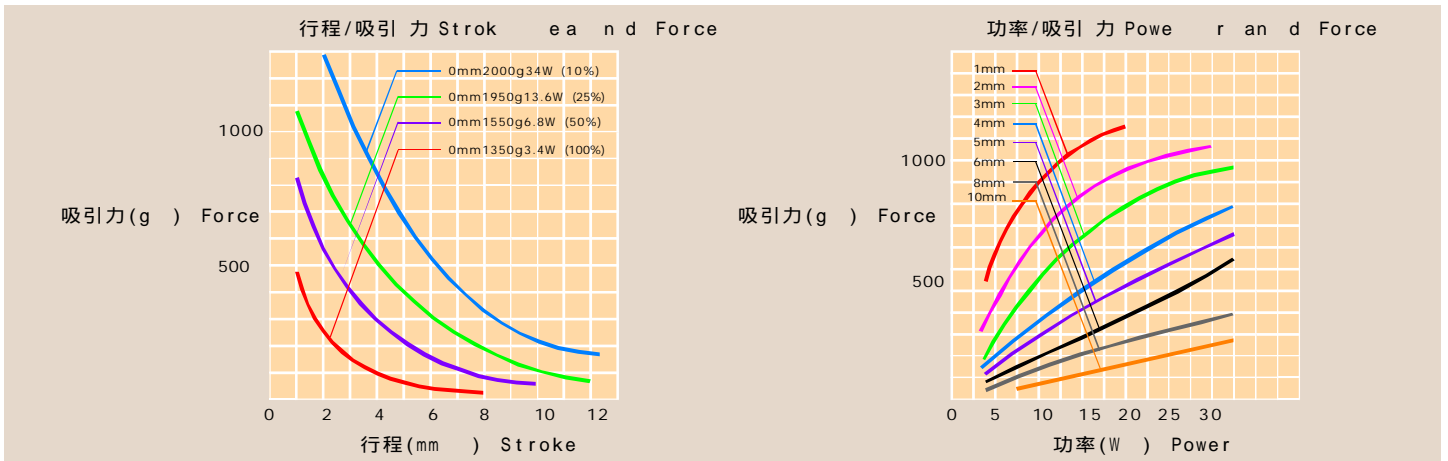

| 动作周期 (100%) ON时间/ON时间+OFF时间<br>Duty cycle (100%) "ON" time / "ON" time + "OFF" time |                 | 100%          | 50%             | 25% | 10% |
|---|-----------------|---------------|-----------------|-----|-----|
|   |                 | 连通 continuous | 间断 intermittent |     |     |
| 最大ON时间 (秒) MAX "ON" Time in second  |                 | -             | 100             | 36  | 7   |
| 20°C 时的功率 watt at 20°C  |                 | 4             | 8               | 16  | 40  |
| 型号 TYPE Number  | 电阻 resistance Ω | 电压 volts DC   |                 |     |     |
| SDO-0837S-06A   | 9               | 6             | 8.5             | 12  | 19  |
| SDO-0837S-12A   | 36              | 12            | 17              | 24  | 38  |
| SDO-0837S-24A   | 144             | 24            | 34              | 48  | 76  |
| SDO-0837S-48A   | 576             | 48            | 68              | 96  | 152 |



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building C1,C2,B2, Jihua Industry District, Shenzhen, China P.C.: 518112

Tel.: (+86 755) 2854 3752

Fax: (+86 755) 2854-3458

E-mail: Sales@Zanty.com

Website: www.zanty.com