
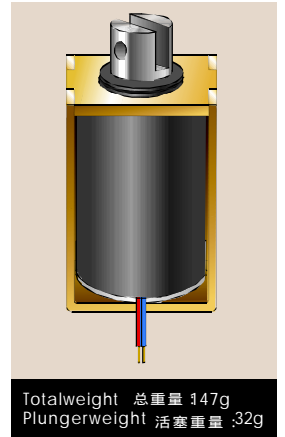


OPEN FRAME SOLENOID SDO-1240L

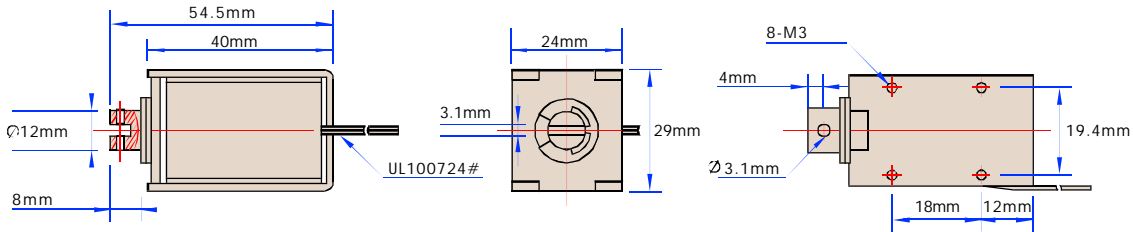


ORDERING INFORMATION

代号编排

SD O-12 40 L- * * *

ZANTY 宗泰
 OpenFrame Solenoid 开置式螺线管
 Plunger dia(mm) 滑杆直径(mm)
 Frame length(mm) 框架长度(mm)
 Coil Resistance 线圈电阻 : * Ω
 Serial number 序号
 Voltage 电压 :06:DC6V 12:DC12V 24:DC24V 48:DC48V
 L: Pull Type 吸入式 S: Push Type 推出式

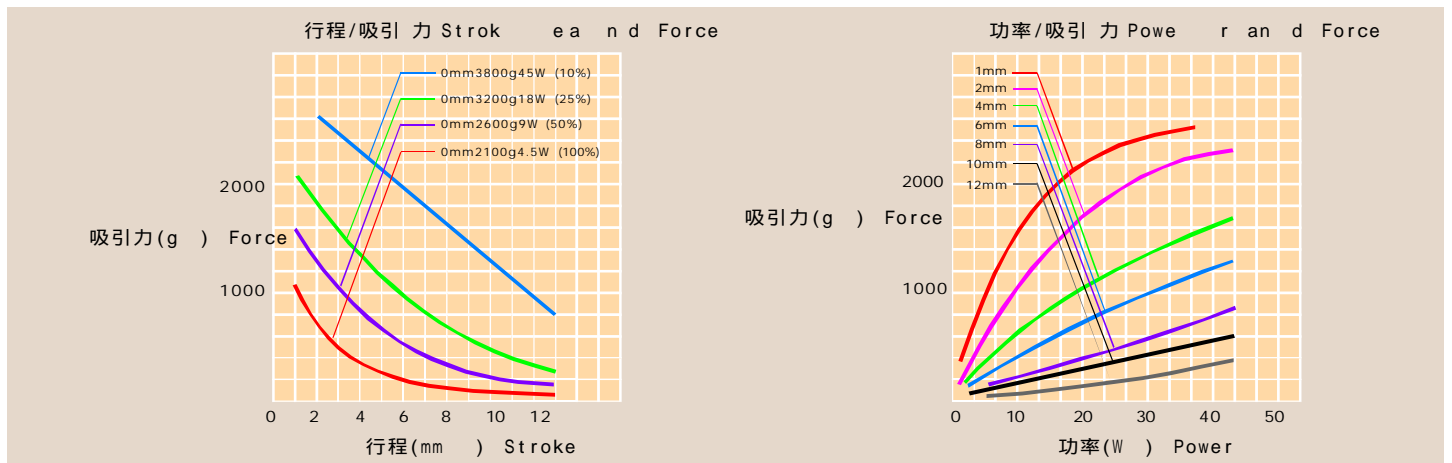

| 动作周期 (100%) ON时间/ON时间+OFF时间 Duty cycle(100%) "ON" time/"ON" time + "OFF" time | | 100% | 50% | 25% | 10% |
|--|-----------------|---------------|-----------------|-----|-----|
| | | 连通 continuous | 间断 intermittent | | |
| 最大ON时间 (秒) MAX "ON" Time in second | | - | 140 | 50 | 9 |
| 20°C时的功率 watt at 20°C | | 4.5 | 9 | 18 | 45 |
| 型号 TYPE Number | 电阻 resistance Ω | 电压 volts DC | | | |
| SDO-1240L-06A | 8 | 6 | 8.5 | 12 | 19 |
| SDO-1240L-12A | 32 | 12 | 17 | 24 | 38 |
| SDO-1240L-24A | 128 | 24 | 34 | 48 | 76 |
| SDO-1240L-48A | 512 | 48 | 68 | 96 | 152 |



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building C1,C2,B2, Jihua Industry District, Shenzhen, China P.C.: 518112
 Tel.: (+86 755) 2854 3752 Fax: (+86 755) 2854-3458
 E-mail: Sales@Zanty.com Website: www.zanty.com