



SDT-1026L TUBULAR SOLENOID

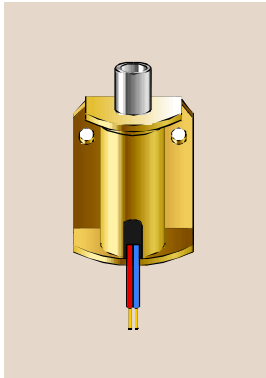

Total weight 总重量 :18g
Plungerweight 活塞重量 :3.2g


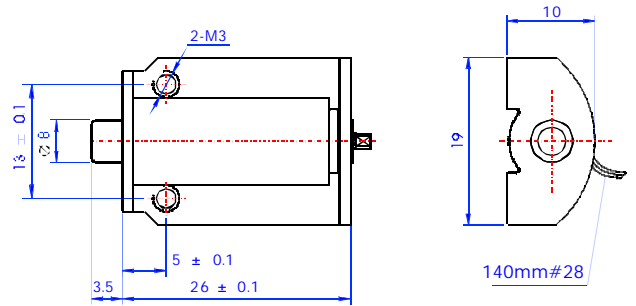


ORDERING INFORMATION 代号编排

ZANTY 宗泰
Tubular Solenoid 筒状电磁铁
Tube dia(mm) 圆筒直径(mm)
Tube length(mm) 圆筒长度(mm)

SD T - 10 26 L - * * *

Coil Resistance 线圈电阻 : * Ω
Serial number 序号
Voltage 电压 :06:DC6V 12:DC12V 24:DC24V 48:DC48V
L: PullType 吸入式 S: Push Type 推出式

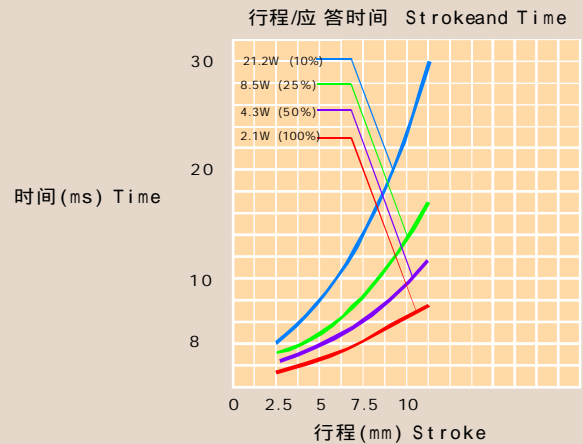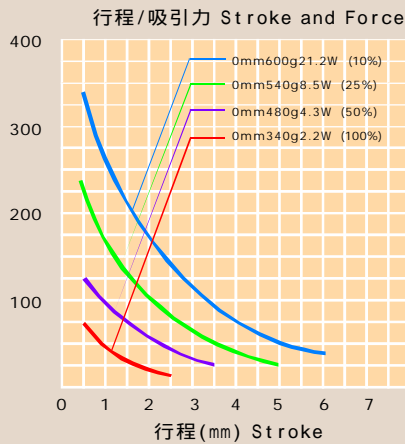

动作周期 (100%) ON时间/ON时间+OFF时间 Duty cycle(100%) "ON" time/"ON" time+"OFF" time	100%	50%	25%	10%
		连通 continuous	间断 intermittent	
最大ON时间 (秒) MAX "ON" Time in second	-	50	18	2
20°C 时的功率 watt at 20°C	2.1	4.3	8.5	21.2
型号 TYPE Number	电阻 resistance Ω	电压 volts DC		
SDT-1026L-06A	17	6	8.5	12
SDT-1026L-12A	68	12	17	24



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building C1,C2,B2, Jihua Industry District, Shenzhen, China
Tel.: (+86 755) 2854-3752
Fax: (+86 755) 2854-3458

P.C.: 518112

E-mail: Sales@Zanty.com
Website: www.zanty.com